

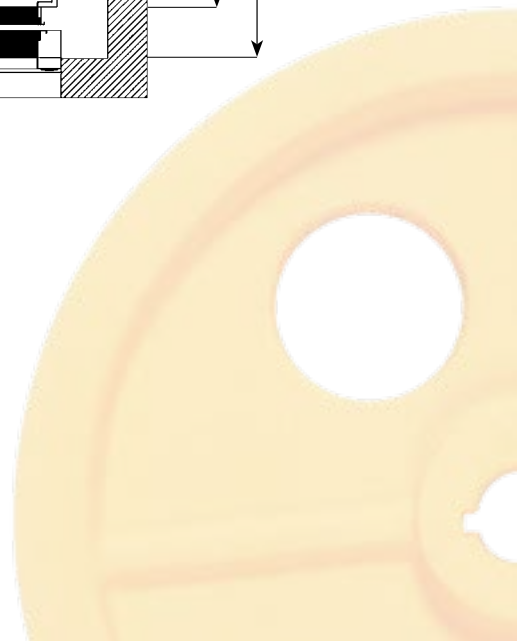


# Overall dimensions

Table of dimensions

Model	Entrances	Rated load (kg/persons)	Car height = 2000/2100 (mm)	Doors height = 2000/2100 (mm)	Shaft wall mounted (mm)
			CWxCD	DW	SWxSD
P4 Flex	A o C	320/4	900x1000	700	1450x1350
P4 Flex	AC	330/4	900x1000	700	1450x1500
P5 Flex	A o C	375/5	800x1200	750	1400x1550
P5 Flex	AC	375/5	800x1200	750	1400x1710
P6 Go	A o C	450/6	1000x1300	800	1600x1650
P6 Go	AC	500/6	1000x1300	800	1600x1800
P8 Go	A o C	630/8	1100x1400	800	1700x1750
P8 Go	AC	670/8	1100x1400	800	1700x1900
P10 Go	A o C	800/10	1400x1350	900	1800x1700
P10 Go	AC	800/10	1400x1350	900	1800x1850
P13 Go	A o C	1000/13	1100x2100	900	1700x2450
P13 Go	AC	1000/13	1100x2100	900	1700x2600

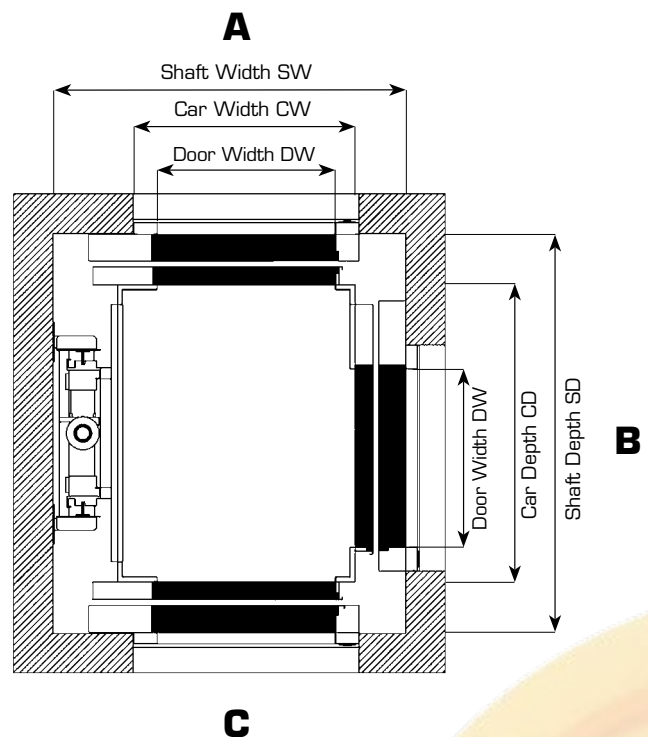

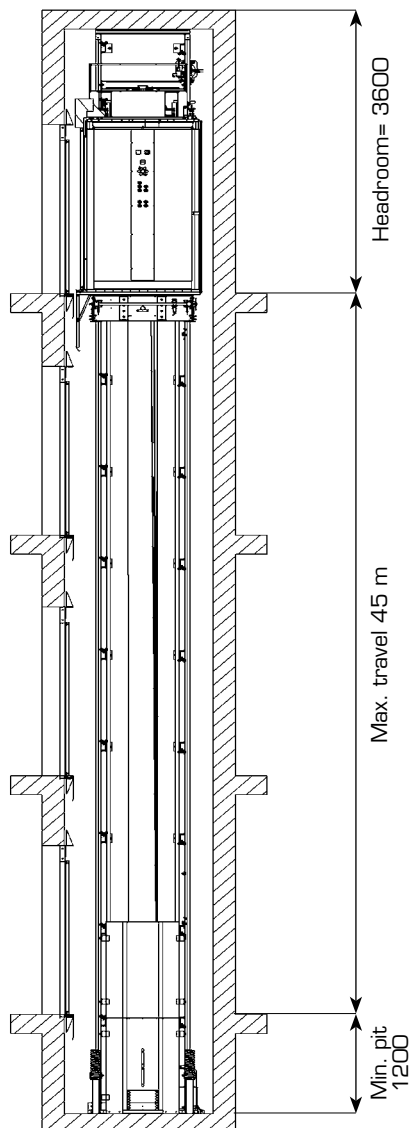

## Technical characteristics

The controller is in a small cabinet positioned at the side of the door at the top floor. It is equipped with VVVF speed regulator to guarantee excellent travel comfort.

Technical data	
Traction	Electric, gearless motor, synchronous type, with permanent magnets.
Rated load	320-450-630-800-1000 kg.
Passengers	4-6-8-10-13.
Installation	Wall mounted or structure supported frame (optional).
Operation	Collective/selective up and down
Stops	Up to 16.
Travel	Up to 45 m.
Minimum pit	1200 mm.
Minimum headroom	3600 mm.
Speed	1 - 1,6 m/s.
Power supply	400 V 3 phases 50/60 Hz.
Rated power	From 1,9 to 4,5 kW.



*Example of car with stainless steel finishes and ceiling with halogen spot lights.*